

MONUMENT RECORD  
State of Indiana - County of Monroe

Section: 36

Township: 9 North



Range: 2 West

Corner ID: Rich W-23

**Monument Description & Remarks:** 3" MAG Spike set in Road (Replaced old MAG nail).  
Survey Sign 5ft above ground at pt. D

**References On File:** Eric Deckard survey, Richland GPS contract (2008), on file in Surveyor  
Office

RECOVERY TIE DRAWING  
Field Book 43 Page No. 04

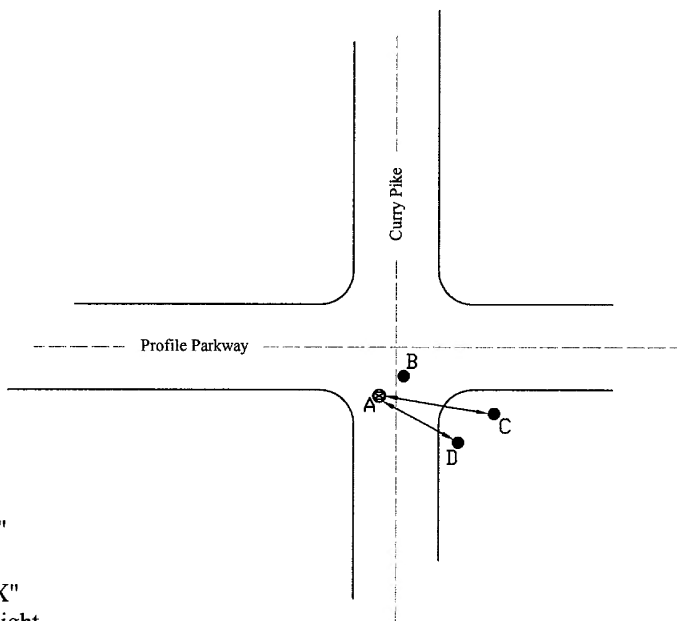


- A - 3" MAG Spike
- B - N 72° E 12.87' to 1" Steel Rod in Road
- C - S 75° E 66.80' to "X" on West bolt in traffic light
- D - S 56° E 53.30' to MAG nail in 14" power line pole

State Plane Coordinate (NAD 83 Survey Feet, Indiana West Zone)-  
Northing: 1429463.234 Easting: 3094604.157

Not To Scale  
Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code, and the above data is given under my hand and seal this 10th day of August 2009.

  
\_\_\_\_\_



Administered by the Monroe County Surveyor Review Board

Date: 10/11/2009

**MONUMENT RECORD**  
**State of Indiana - County of Monroe**

**Section: 36**


**Township: 9 North**

**Range: 2 West**

**Corner ID: Rich W-23**

**Monument Description & Remarks:** Found 5/8" Rebar in centerline of Curry Pike, in line with the South curb of Profile Parkway, 1" below asphalt with orange painted triangle around 4" x 4" hole in asphalt (Center 1/4).

**References on file in the County Surveyor's Office:** Whitehall Crossing Survey, Bynum Fanyo & Associates, Book #3, page 626, Recorder's Office; Land Title Survey, Bledsoe Tapp & Co., Book #2, page 313, Recorder's Office.

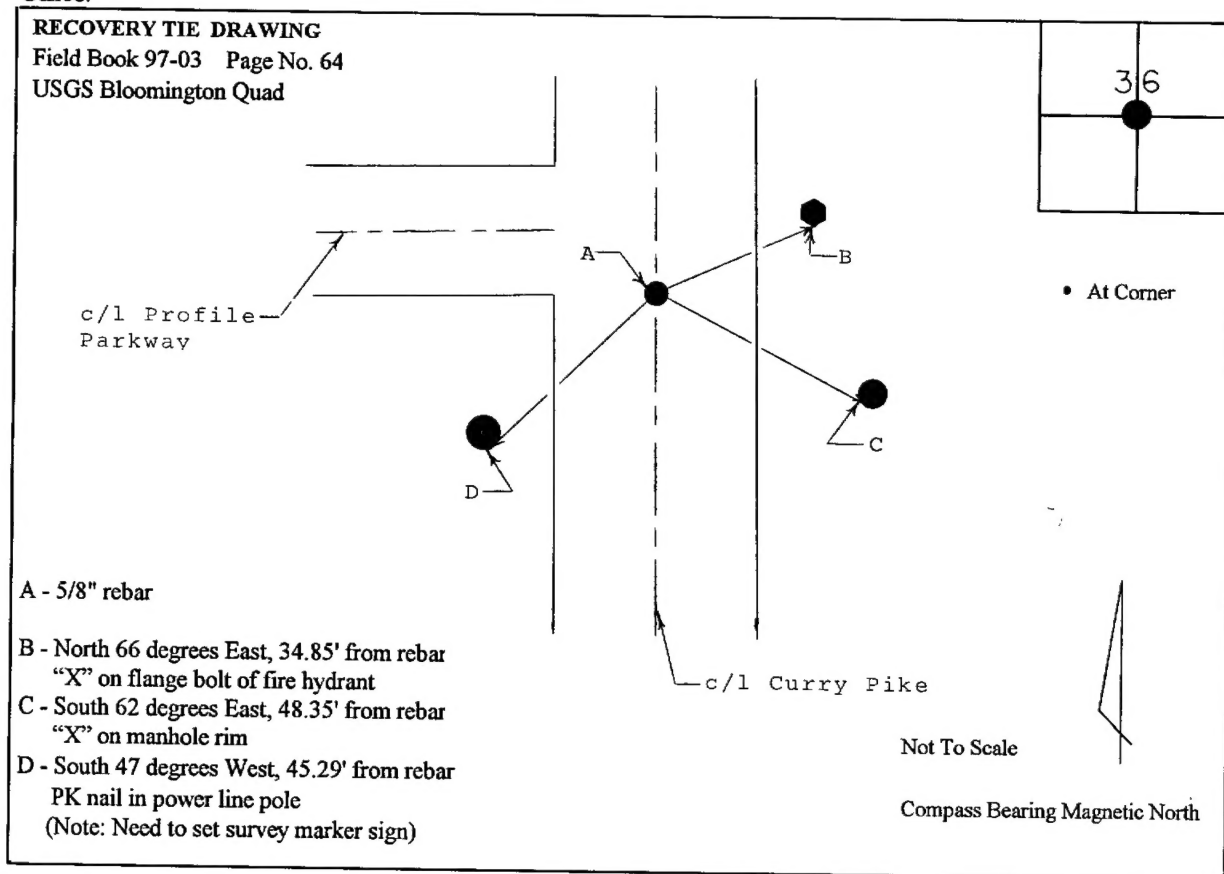

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of Section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 4th day of December, 1997.

Administered by: Surveyor Review Board

